


Revision	Revised By	Description	Date	Approval
New	GP	Initial Release	11-12-18	MO

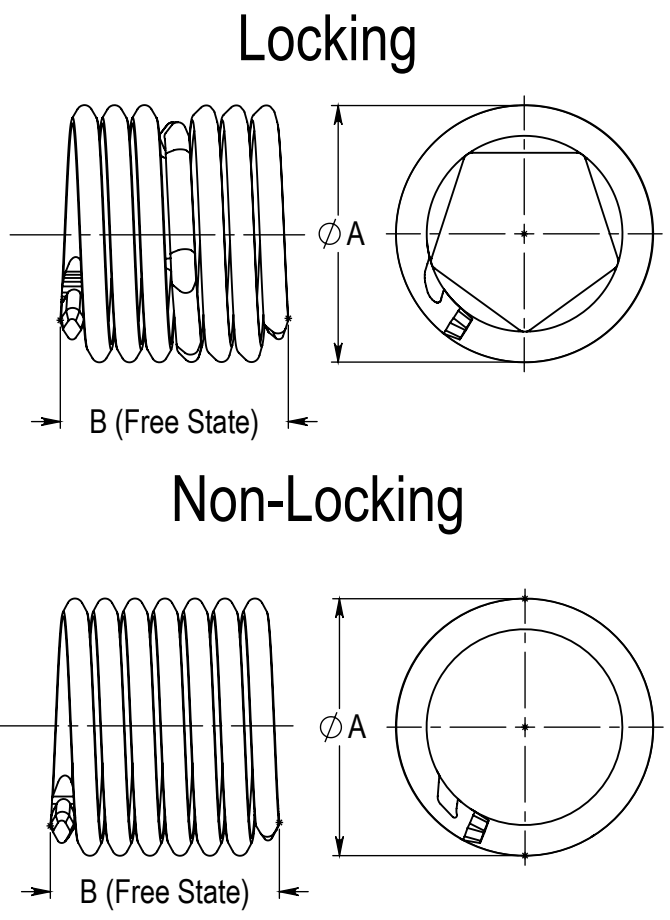

2TLM	-	3X0.5	C	-	4.5	W	SF
1		2	3		4	5	see note 9

Nominal Thread Size	1		2	3	4					5	Free Outer Diameter (A)		Number of Coils (B, see note 4)				
	Insert Style				Size	Material	Nominal Length					Finish	Min	Max	1D	1.5D	2D
	Locking	Non-Locking	1D	1.5D			2D	2.5D	3D								
M2X0.4	2TLM	2TNM	2X0.4	B- Phosphor Bronze C- CRES Steel (304 Stainless Steel) ¹⁰ N- Nitronic 60® M- Nimonic 90® T- Inconel X-750	2.0	3.0	4.0	5.0	6.0	Blank- No Finish W- Dry Film Lubricant Y- Cadmium V- Silver Plating A- Passivation P- Xylan B- Blue Dye G- Green Dye	2.50	2.70	3-1/4	5-1/2	7-3/4	10-1/8	12-3/8
M2.5X0.45			2.5X0.45		2.5	3.8	5.0	6.3	7.5		3.20	3.70	3-3/8	5-3/4	8-1/8	10-1/2	12-3/4
M3X0.5			3X0.5		3.0	4.5	6.0	7.5	9.0		3.80	4.35	3-3/4	6-3/8	8-7/8	11-3/8	13-7/8
M4X0.7			4X0.7		4.0	6.0	8.0	10.0	12.0		5.05	5.60	3-5/8	6-1/8	8-5/8	11-1/8	13-5/8
M5X0.8			5X0.8		5.0	7.5	10.0	12.5	15.0		6.25	6.80	4-1/8	6-7/8	9-5/8	12-3/8	15-1/8
M6X1			6X1		6.0	9.0	12.0	15.0	18.0		7.40	7.95	4	6-3/4	9-1/2	12-1/8	14-7/8
M8X1.25			8X1.25		8.0	12.0	16.0	20.0	24.0		9.80	10.35	4-1/2	7-3/8	10-1/4	13-1/4	16-1/8
M10X1.5			10X1.5		10.0	15.0	20.0	25.0	30.0		11.95	12.50	4-7/8	8	11-1/8	14-1/4	17-3/8
M12X1.75			12X1.75		12.0	18.0	24.0	30.0	36.0		14.30	15.00	5	8-1/4	11-1/2	14-5/8	17-7/8

- Notes:
- For each threadsize, complete part number consists of combining columns 1-5 across each row.
 - The nominal length is a calculated number and cannot be used to measure the insert in the free state. It is the actual installed length of the insert plus 0.5 pitch ($L_n = L_a + 0.5P$), see column 4.
 - The nominal length of the insert is a function of the nominal thread size ($1.5D \times 3 \text{ mm} = 4.5 \text{ mm}$).
 - The number of free coils is measured from notch to notch. It is the total number of revolutions ± 0.25 coil.
 - Assembled length of insert is in accordance to MA1567.
 - Locking torque specification conforms to MA1565.
 - As applicable, inserts meet NA0276 specification.
 - When assembled in an STI thread, conforming to MA1567 specification, the finished thread shall conform to FED-STD-H28/21 and shall accept external threads per MA1370.
 - For strip-feed packaged inserts, use "SF" at the end of the part number. Not available for all plating options. Leave blank for bulk packaged inserts.
 - 304 Stainless Steel is the most popular wire material and meets AS7245 specification.

KATO Fastening Systems, Inc., 11864 Fishing Point Dr., Newport News, VA 23606, www.katofastening.com			
Drawing No.	KSTD-009	Description	KATO Tangless Metric-Coarse Pitch Standard, Locking & Non-locking, Screw Thread Insert (STI)
Revision	New	Drawn By	G. Patterson
Date	11-12-18	Approved By	M. Oana



THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND IS COVERED BY U.S. & INTERNATIONAL PATENTS. REPRODUCTION IN WHOLE, OR IN PART, WITHOUT THE EXPRESS WRITTEN CONSENT OF KATO FASTENING SYSTEMS, INC. IS STRICTLY PROHIBITED